

LMI G2 48V 350–700mA 3–20V FO Slim
localDIM

Product description

- Dimmable via potentiometer
- Up to 89 % efficiency
- Output voltage range 3 – 20 V
- Adjustable output current between 350 and 700 mA via DIP switch
- Output current tolerance $\pm 5\%$
- Max. tc point temperature 221 °F
- 5 years guarantee (conditions at www.tridonic.com)

Housing properties

- Pure PCB for built-in application
- Suitable for class III applications

Interfaces

- Terminal blocks: 0° push terminals
- Potentiometer equipped

Features

- Adjustable output current
- Protective features (short-circuit, no-load)

Benefits

- Application-oriented operating window
- Small dimensions for miniaturization of luminaires
- Same form factor as DALI variant for easy design-in




Standards, page 4



LMI G2 48V 350–700mA 3–20V FO Slim
localDIM

Technical data

DC voltage input	48 V
DC voltage range	46 – 50 V
Max. input power	16 W
Typ. efficiency (full load) ^①	89 %
Typ. input current in no-load operation	8 mA
Typ. input power in no-load operation	< 0.5 W
Time to light (full load)	< 0.6 s
Hold on time at power failure	< 5 ms
Output current tolerance ^②	± 5 %
Max. peak output current	≤ output current + 30 %
Output LF current ripple	same as LF ripple on 48 V bus
Max. output voltage (no-load voltage)	48 V
Surge voltage at output side (against PE)	same as on 48 V bus
ESD classification	Severity level 2
Max. tc point temperature	221 °F
Guarantee (conditions at www.tridonic.com)	5 years
Dimensions L x W x H	4.92 x 0.58 x 0.49 inch

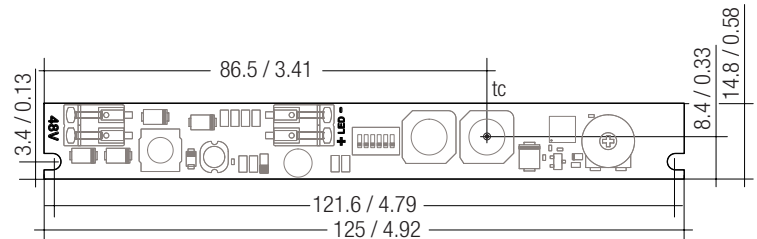

Dimensions in mm / inch

Ordering data

Type	Article number	Packaging box	Packaging carton (contains 10 boxes)	Packaging pallet	Weight per pc.
LMI G2 48V 350-700mA 3-20V FO Slim	28000730	5 pc(s).	50 pc(s).	3,000 pc(s).	0.035 lbs

We recommend using following LCU DC power supply together with this LMI LED

Driver:

Type	Article number	Packaging carton	Packaging pallet	Weight per pc.
LC 48V 100W DC-STR UNV FO Ip	28001983	15 pc(s).	540 pc(s).	0.756 lbs

Specific technical data

Type	Output current	Min. forward voltage	Max. forward voltage	Max. output power (at 48 V, full load)	Typ. power consumption (at 48 V, full load)	Typ. current consumption (at 48 V, full load)
LMI G2 48V 350-700mA 3-20V FO Slim	350 mA	3 V	20 V	7 W	7.9 W	165 mA
	400 mA	3 V	20 V	8 W	9.0 W	187 mA
	450 mA	3 V	20 V	9 W	10.1 W	210 mA
	500 mA	3 V	20 V	10 W	11.1 W	232 mA
	550 mA	3 V	20 V	11 W	12.2 W	154 mA
	600 mA	3 V	20 V	12 W	13.4 W	280 mA
	650 mA	3 V	20 V	13 W	14.3 W	298 mA
	700 mA	3 V	20 V	14 W	15.6 W	325 mA

^① Depending on the selected output current.

^② Valid at 100 % dimming level.

1. Standards

EN 61347-1
EN 61347-2-13
EN 62384


2. Thermal details and lifetime

2.1 Expected lifetime

Lifetime is limited by DC power supply.
Max. tp point temperature must not be exceeded.

3. Installation / wiring


3.1 Circuit diagram

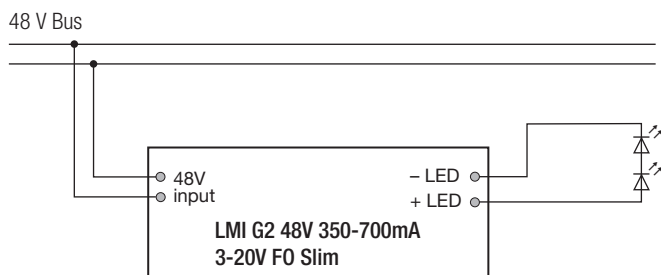

3.2 Wiring type and cross section

Solid or stranded wire with a cross section of 0.2 – 0.75 mm² / AWG 19 – 24.
Strip 6 – 7 mm / 0.24 – 0.28 inch of insulation from the cables to ensure perfect operation of terminals.

LED module/LED Driver/supply



3.3 Wiring guidelines

- Run the 48 V cables separately from the mains connections and mains cables to ensure good EMC conditions.
- Keep the 48 V DC output wiring as short as possible to ensure good EMC. Tridonic did successfully EMC test with more than 30 m on grounded metal housings.
- For plastic housing reduce the cable length if the EMC gets worse.
- The max. cable length, including track light, is limited only by voltage drop: Supply the last LMI 48V in the track light with minimum 46 V. More details in the voltage drop application note!
- Secondary switching is not permitted.
- To avoid the damage of the Driver protect the wiring against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.).
- Additional systems or lines can compromise or disrupt the PLC communication in the DC string system. Therefore do not install any other systems or cables parallel to the DC string system cables.

3.4 Hot plug-in of LED module

Hot plug-in is not supported due to residual output voltage of > 0 V.
The LED Driver could be damaged and there is a risk of destroying the LED module.

3.5 EOS/ESD safety guidelines




The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice.


For further information for EOS/ESD safety guidelines and the ESD classification please refer to the brochure entitled <http://www.tridonic.com/esd-protection>.

4. Electrical values

4.1 Operating window

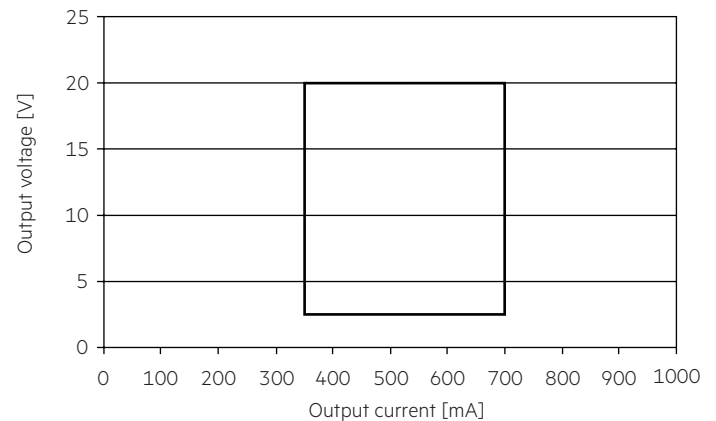

4.2 Efficiency vs load

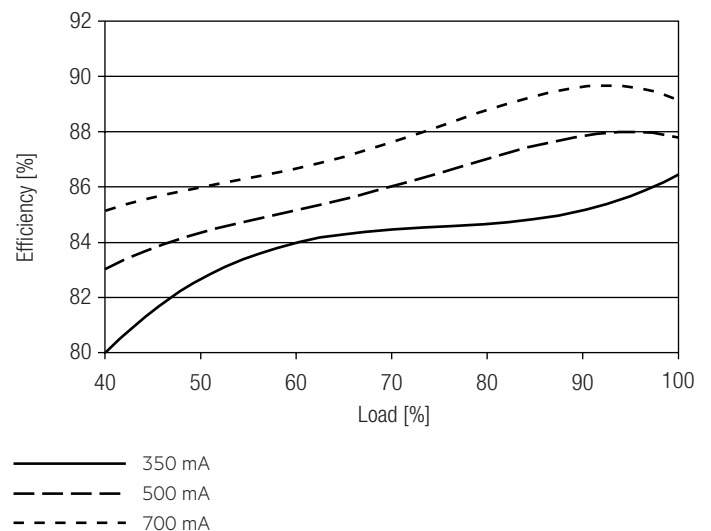

100 % load corresponds to the max. output power (full load) according to the table on page 2.

5. Functions

5.1 Adjustable current

The output current of the LED Driver can be adjusted in a certain range.

1. step: set current with on board dip switch S1-1 to S1-4
2. step: choose function fixed current or potentiometer with on board dip switch S1-5 and S1-6

Step 1 and 2 have to be done to configure LED Driver properly.

The factory default setting (no dip switch are set) is 350 mA \pm 5 %. This is normal operation.

	S1-1	S1-2	S1-3	S1-4	S1-5	S1-6
Output current	350 mA	OFF	OFF	OFF	ON or OFF	-
	375 mA	OFF	OFF	ON	OFF	-
	400 mA	OFF	OFF	ON	ON	-
	425 mA	OFF	ON	OFF	OFF	-
	450 mA	OFF	ON	OFF	ON	-
	475 mA	OFF	ON	ON	OFF	-
	500 mA	OFF	ON	ON	ON	-
	525 mA	ON	OFF	OFF	OFF	-
	550 mA	ON	OFF	OFF	ON	-
	575 mA	ON	OFF	ON	OFF	-
	600 mA	ON	OFF	ON	ON	-
	625 mA	ON	ON	OFF	OFF	-
	650 mA	ON	ON	OFF	ON	-
	675 mA	ON	ON	ON	OFF	-
700 mA	ON	ON	ON	ON	-	
Function	Potentiometer	-	-	-	ON	OFF
	Fixed current	-	-	-	OFF	ON
	350 mA	-	-	-	ON	ON
	350 mA	-	-	-	OFF	OFF

If potentiometer function is used 100 % output current level can be set by on board dip switch.

With potentiometer current can be dimmed down to 10 % (amplitude modulation only). Max. torque for potentiometer is 5 Ncm.

5.2 Short-circuit behaviour

LED Driver shuts down. Restart is needed.

5.3 No-load operation

LED Driver shuts down. Restart is needed.

6. Miscellaneous

6.1 Conditions of use and storage

Humidity: 5 % up to max. 85 %, not condensed (max. 56 days/year at 85 %)

Storage temperature: -40 °F up to max. +176 °F

The LED Drivers have to be acclimatised to the specified temperature range (ta range of DC power supply) before they can be operated.

The LED Driver is declared as inbuilt LED controlgear, meaning it is intended to be used within a luminaire enclosure.

If the product is used outside a luminaire, the installation must provide suitable protection for people and environment (e.g. in illuminated ceilings).

6.2 Additional information

Additional technical information at www.tridonic.com → Technical Data

Lifetime declarations are informative and represent no warranty claim. No warranty if device was opened.